



# BTM

## **BATTERY TUGGER MANUAL**

SWAPPING BATTERIES SINCE 1984



CE



**BTM**

# BATTERY TUGGER MANUAL

---

The simple pallet truck design and solid wheels make the CBH Manual Battery Tugger as simple to operate as any standard pallet truck. Easy to turn and move while fully loaded, this unit comes equipped with a battery safety stop and a ratchet crank handle to prevent slipping.

Able to load and unload batteries entirely solo, the BTM is a compact unit ready to tackle day-to-day battery maintenance for operators and service technicians everywhere. This unit is available in three convenient sizes to accommodate a wide range of battery sizes.

## **MANUALLY ACTIVATED**

Completely manual and easy to use the BTM has been engineered for zero pushback while changing

## **STAND-ALONE**

This unit is completely independent and does not require a fork truck. It's manual design makes it easier for anyone to swap a battery.

## **EASY TO OPERATE**

Two fixed front casters and two swivel casters in the rear make the BTM easy to operate, and its convenient waist-high design offers lifting and lowering using only hand controls.

## **WARRANTY**

Every unit comes with a standard 1-year warranty for your protection.

## **LIFTING RANGE**

The BTM comes equipped with a lifting range of 4"-22" or 102 - 559 mm.

## **FOR SMALLER OPERATIONS**

This unit is ideal for operations with smaller forklift fleets helping forklift drivers of all ages service batteries.

# BTM



## KEY FEATURES + OPTIONS


- ✓ Custom colours available
- ✓ Durable rollers
- ✓ Battery safety stop
- ✓ Affordable & compact
- ✓ Integrated hand pallet truck lift mechanism
- ✓ Single point push/pull travel
- ✓ Manual foot brake
- ✓ Fixed & swivel casters
- ✓ Extension limiter
- ✓ Available in size 24", 30" or 36" wide


## GENERAL SPECS

Capacity	3,200 lbs / 1,451 kgs
Standard Colour	Orange
Battery connection type	Manual chain hook

## MODEL-PART NUMBER BREAKDOWN

Example: BTM-24-ML-4-22

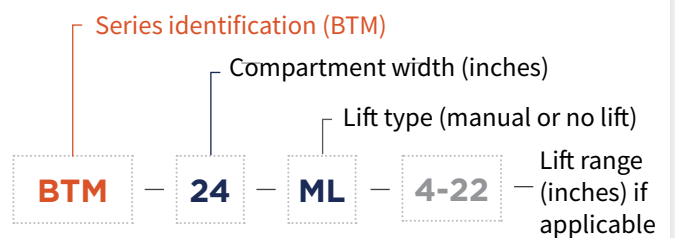

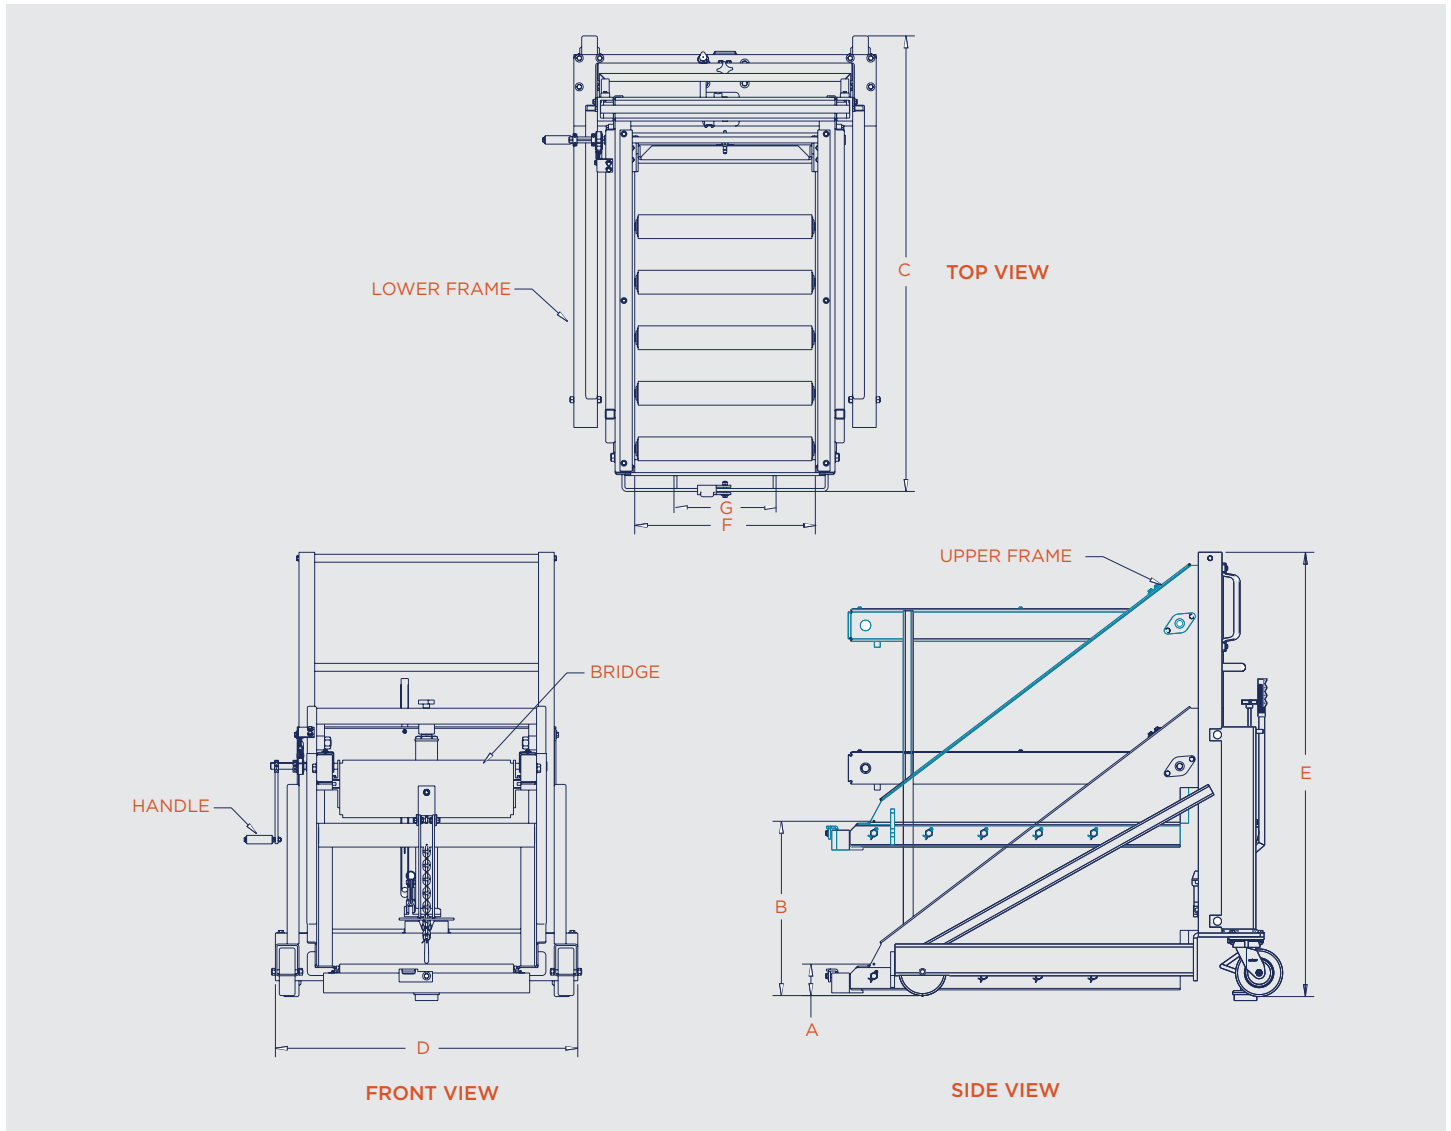

## DIMENSIONAL DATA

### BTM-24

### BTM-30

### BTM-36

<b>A</b>	Minimum roll-out height	4"/102 mm		
<b>B</b>	Maximum roll-out height	22"/ 559 mm		
<b>C</b>	Overall length	57.43"/ 1459 mm		
<b>D</b>	Overall width	43"/ 978 mm	49" / 1245 mm	55"/ 1283 mm
<b>E</b>	Overall height *fully elevated*	56"/ 1422 mm		
<b>F</b>	Battery compartment width	24"/ 610 mm	30" / 762 mm	36"/ 914 mm
<b>G</b>	Maximum battery width	23"/ 584 mm	29"/ 737 mm	35"/ 902 mm
	Service weight	700 lbs / 318 kgs	754 lbs / 342 kgs	808 lbs / 367 kgs





# FABRICATING & AUTOMATION

Our specialized team of machinists create tools, parts, products, and attachments to solve everyday material handling dilemmas while our team of automation experts focus on robotic engineering, PLC and HMI programming and process automation geared towards your specific manufacturing needs. We deliver world-class expertise by innovating products that help you meet the demands of day-to-day operations.

Let's get started on your next project.



- ✓ Operational Up-time
- ✓ In-house Manufacturing
- ✓ Safety & Security

- ✓ Automated Battery Handling
- ✓ System Design
- ✓ And more!

[info@carneyautomation.com](mailto:info@carneyautomation.com)

[CARNEYAUTOMATION.COM](http://CARNEYAUTOMATION.COM)



- ✓ Product Transfer Systems
- ✓ Below-The-Hook Devices
- ✓ Storage Systems

- ✓ Ergonomic Equipment
- ✓ Forklift & Picker Attachments
- ✓ And more!

[info@carneyfabricating.com](mailto:info@carneyfabricating.com)

[CARNEYFABRICATING.COM](http://CARNEYFABRICATING.COM)



## HAVE ADDITIONAL QUESTIONS? GET IN TOUCH

---

[sales@carneybatteryhandling.com](mailto:sales@carneybatteryhandling.com)  
[www.carneybatteryhandling.com](http://www.carneybatteryhandling.com)

Tel: 1.905.564.0303  
Toll free: 1.866.THE.BULL

*Due to continuous product improvements, specifications are subject to change without notice. Some systems and features shown may be optional at extra cost.*

©2025 Carney Battery Handling Ltd.  
BTM\_specifications\_NA